

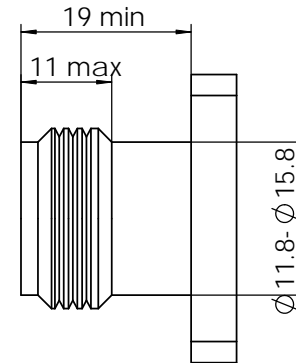


REVISIONS		
REV	DESCRIPTION	DATE
1	Add note 6	2020.1.2

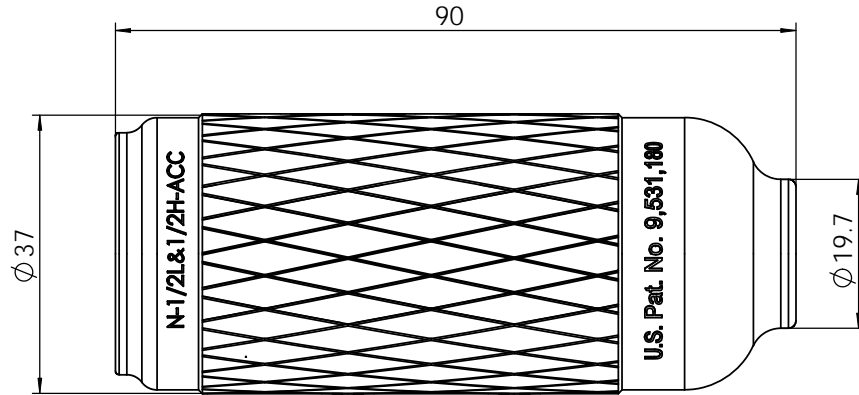

receptacle(female)  
connector requirement



optional accessory

1. UV resistant (1120W/960 h)
  2. Life: 10 years
  3. Working temperature: -55 °C~+155 °C
  4. Acid alkali resistant
  5. Waterproofing standard IP68
  6. This boot can be installed **before** and **after** cable jumper assembly.
- \* Optional accessory: with guide AFJ89-6, this boot can be installed **after** cable jumper assembly.

DRAWN		TITLE		<b>Amphenol</b>		
CHECKED		WPS boot, N male for 1/2" superflex and 1/2" annular cable		AMPHENOL FUYANG CO.,LTD CHANGZHOU, CHINA		
APPROVED		SHEET	SCALE	METRIC	PART NO.	VER
		1/1	1.5/1	mm	AF2040677	1
					REV	1
					AF2040677	